# Remote Control User Manual
# YET2169-S28

## Product Description

Yet2169-s28 is a remote control for transmitting RF signal with a frequency of 433.92MHz and modulation mode of OOK.This product has a display window of 8-segment digital tube, which can display a total of 9 channels from 0 to 8.
Different channels can be freely switched by pressing the button, and different actions can be performed when the receiver receives different code values.

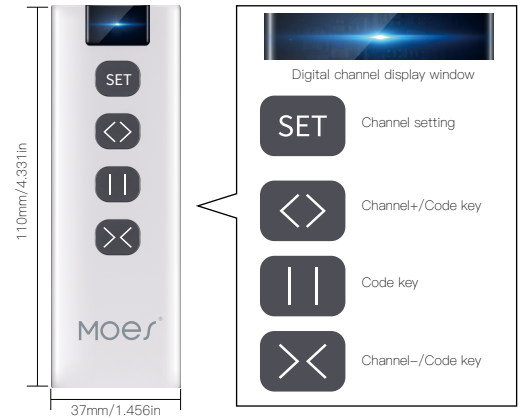


## Function Description

### 1.Channel setting

a.Press "SET",digital tube flashes for setup mode.
b.Press "<>"in setup mode,channel value increases.When the channel value increases to 8,press the key again to start increasing from 0.
c.Press "><"in setup mode,channel value decreases.When the channel value decreases to 0,press the key again to start decreasing from 8.
d.Press"SET"in setup mode,the digital tube stops flashing for exiting setup mode.

### 2. Transmit code

Press any key among "<>""II""><"in non-setup mode,then remote starts to transmit signal,the red indicator in the lower right corner flashes fast to indicate it is transmitting.Release the key to stop transmitting and the digital tube stops lighting.

## Product parameter

| | |
|---|---|
| Working voltage: | DC12V |
| Working temperature: | -20℃ - +60℃ |
| Encoding mode: | Imitation learning code |
| Working frequency: | 433.92MHz |
| Working current: | ≤16mA |
| Number of channel | 9 |

Support:service@moeshouse.com

100mm

160mm